



CAPACITA' FORATURA
DRILLING CAPACITY **ø 5**

VH


modello 04

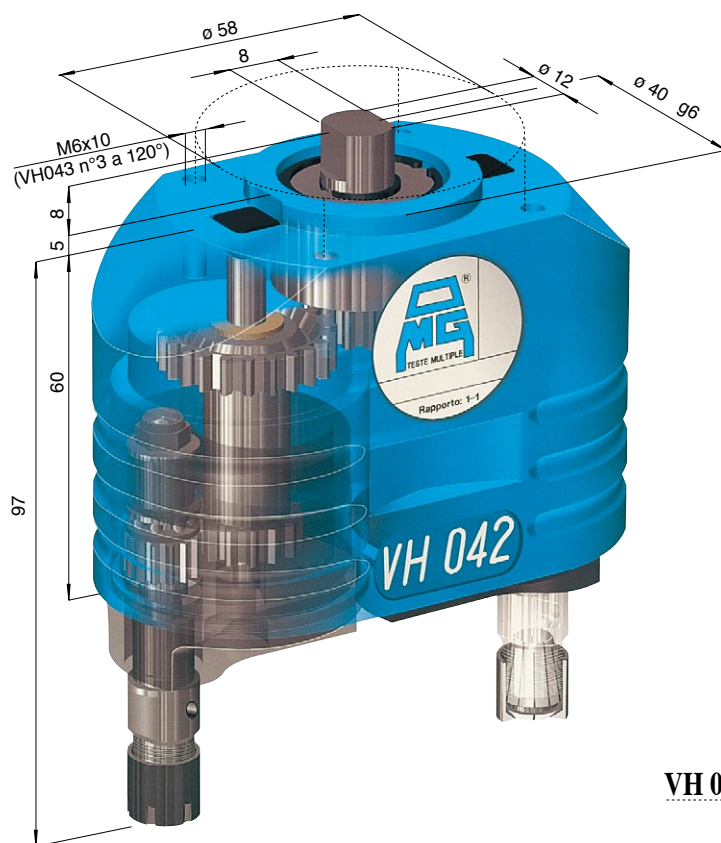


VH 042




VH 043 L



VH 043



VH 044

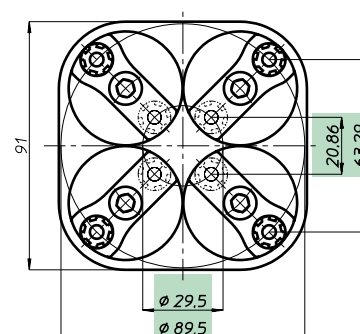

Testa modello Head type	VH 042	VH 043 L	VH 043	VH 044
Articolo Item	VH 042 PV	VH 043 LP	VH 043 P	VH 044 P
Attacco utensile Spindle type	ER 8 - max ø 5			
Articolo Item				
Attacco utensile Spindle type				
N. mandrini Spindles nr.	2	3	3	4
Campo di lavoro min.	12	12 + 12	ø 18,5	ø 29,5
Centre distances max.	72	42 + 42	ø 78,5	ø 89,5
Capacità foratura	Acciaio Rm 500 N/mm ² - ø 4			
Drilling capacity	Ghisa GG25 - ø 5			
Maschiatura Tapping	M 3			
Rapporto Ratio	1 - 1			
Velocità RPM	4.000			
Peso Weight	Kg. 0,95	1,05	1,4	1,9

Teste multiple ad assi variabili • Variable axis heads



BAH

TA-CP

TA

MO

HT

VH

TSI/TSX

T

MT-TC-TC3

Accessori
Accessories

Appendice tecnica
Technical supplement


6-2

NOTA: A.B.C.D. dati macchina
NOTE: A.B.C.D. machine features

DIN 238	CODICE
B 10	011277
B 12	011278
B 16	011279
B 18	011280

DIN 55058	CODICE
16	525405
20	525406
28	525407

DIN 228	CODICE
CM 1	011115
CM 2	011120
CM 3	011125

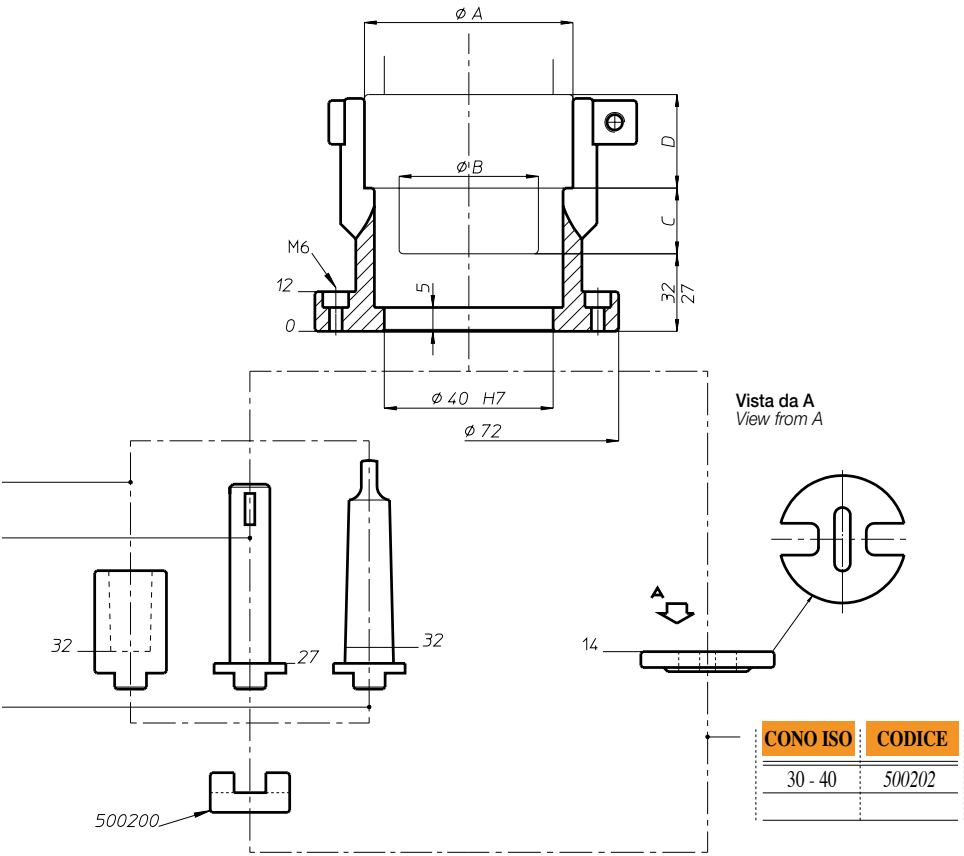

Teste multiple ad assi variabili • Variable axis heads