


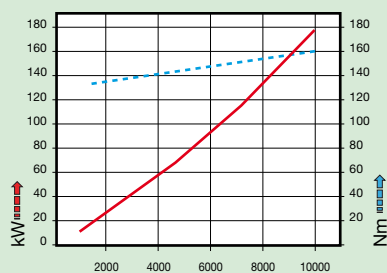
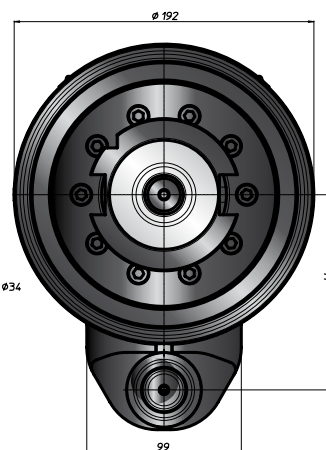
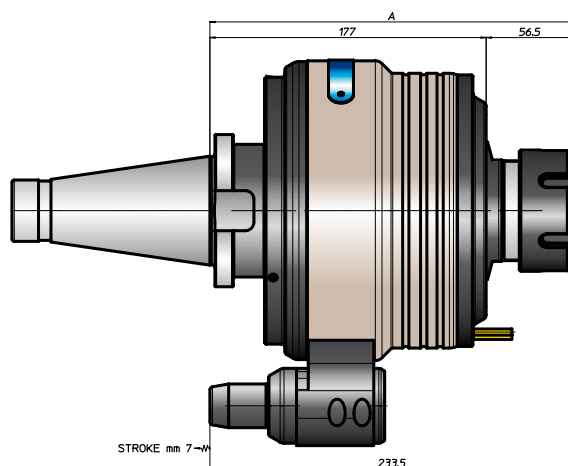
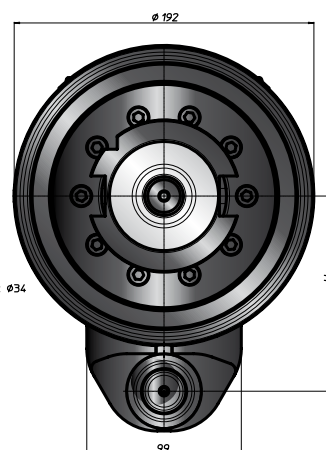


MOX34

caratteristiche/features
peso/weight
prestazioni/performance

rotazione/rotation


CONO SHANK	size	A	B	H	
				standard	optional
DIN69871	50	233,5	35	125	-
	60	249,5	51		
ANSI B5.50	50	233,5	35	125	-
	50	233,5	51		
HSK	100	245,5	53	125	-
	100	245,5	53		
CAPTO	C8	241,5	-	125	-
	C8	241,5	-		
KM	100	237,5	-	125	-
	100	237,5	-		
DIN2080	50	233,5	-	125	-
	50	233,5	-		
ANSI B5.18	50	233,5	-	125	-
	50	233,5	-		

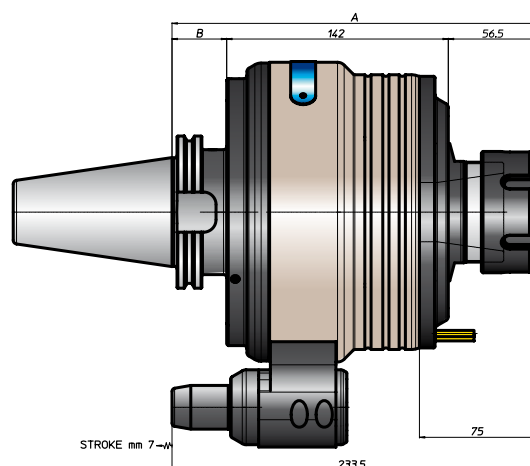

FH

BAH

TA.CP

TA

MO

HT

VH

TSI/TSX

T

MT-TC-TC3

Accessori
Accessories

Appendice tecnica
Technical supplement

5-7