



Leistungsdiagramm



M12



4000




11,7 kg

Drehrichtung



Ausgang




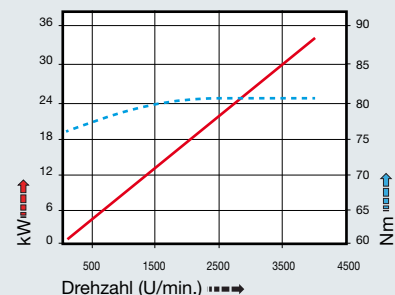


Spindelausführungen

2 Fräseraufnahme
Ø16-Ø22-Ø27

3 Whistle-Notch
Ø16

4 DIN69893-HSK
HSK40

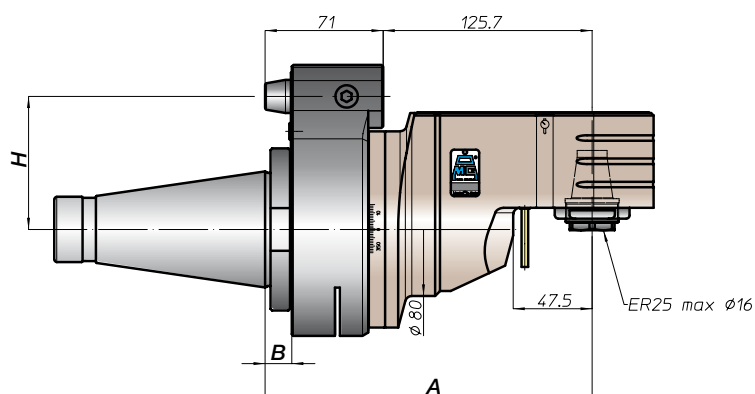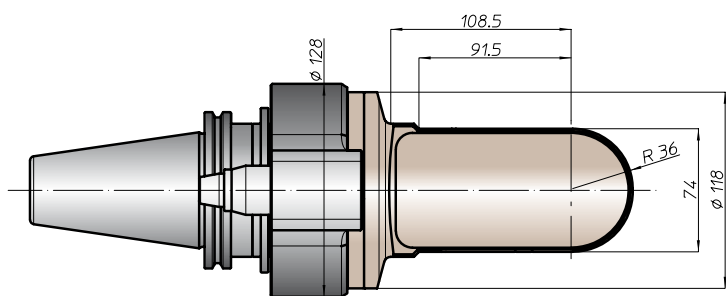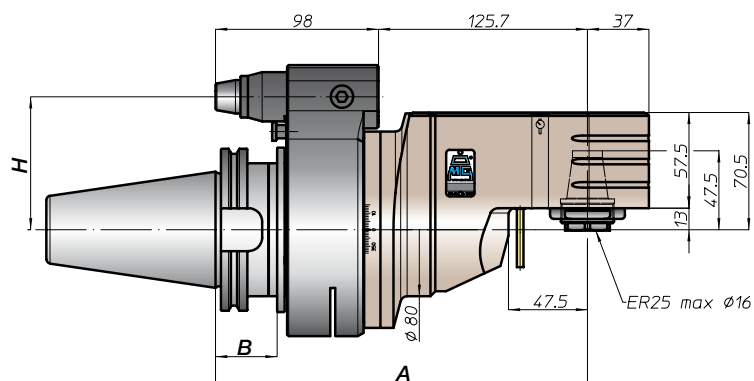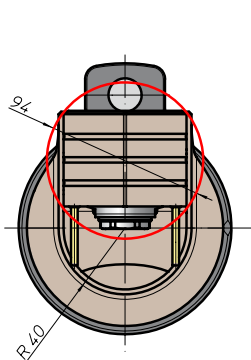

ANTRIEBS- SCHAFT	größe	A	B	H	
				standard	optional
 DIN9871	-	223,5	35	-	-
	-			-	-
	45			80	110
	50				
 ANSI B5.50	-			65	-
	50			80	110
 BT	-			65	
	50	231,5	45	80	110
 HSK	-		-	-	
	80	232,5	46	80	110
	100				
 CAPTO	-	227,5	-	-	-
	-			80	110
	C8				
 KM	-	223,5	-	-	-
	80			80	110
	100				
 DIN2080	-	199,5	16	-	-
	-			-	-
	-			80	110
	50				
 NMTB	-	-	-	-	-
	50	199,5	16	80	110